



# XLT48

**PRELIMINARY  
SPECIFICATIONS**


## TWO-WAY MONITOR SYSTEM

### APPLICATIONS:

- Monitoring / Sound Reinforcement / Portable PA
- Clubs
- Houses of Worship
- Sport Facilities & Health Clubs
- Industrial A/V
- Keyboard Systems

### FEATURES:

- 1" Titanium HF Driver
- Switchable Passive / Biamp Modes
- HF Level Switch
- PowerSense™ DDP Circuit with Front/Rear Indicators
- Wedge-type Enclosure for Stage Monitoring
- Steel Bar-Handles and Input Panel
- Black-Carpeted Exterior

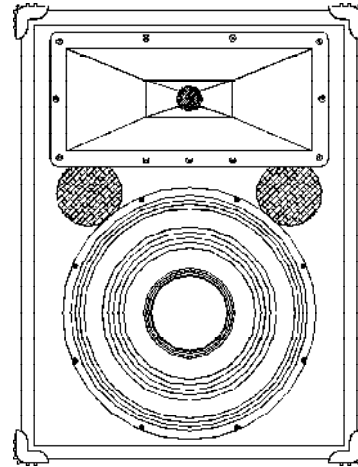

### DESCRIPTION

The XLT48 is a compact, high-efficiency, wedge-type, two-way stage monitor system. It has both the clear, articulate output needed for cutting through other stage sounds and the smooth response that allows high output levels without feedback. It uses a unique 1" titanium diaphragm HF compression driver coupled to a large format, 90 x 40 degree Pattern Control horn for extended highs and wide-range pattern control. A Ferrofluid-cooled 15" woofer provides excellent low frequency response and high power handling capability. These components are matched to a heavily braced, optimally tuned, bass-reflex enclosure.

The XLT48's robust crossover seamlessly integrates the acoustic outputs of the high and low frequency components. To help ensure continued operation and reliability, the PowerSense™ DDP (Dynamic Driver Protection) circuit monitors the power input to each driver and absorbs excessive power inputs that might otherwise damage them. A side panel LED as well as front visible indication illuminate when the PowerSense™ circuitry is active, warning the operator of excessive power input. To provide stable, long-term operation, the crossover is built on a steel input panel and uses 250V film capacitors, precision inductors and high-grade circuit boards.

A Passive/Biamp switch allows easy switch-over between two modes of operation. In Passive mode a single amplifier channel is used to power the loudspeaker. In Biamp mode two amplifier channels are used to separately power the HF and LF sections. No external electronic crossover is required. An HF Level switch is provided to "voice" the system for different musical styles or personal preferences.

The XLT48 has two Neutrik Speakon NL4MP jacks that mate with NL4FC in-line connectors and two 1/4" phone-type jacks. In Passive mode, all jacks are wired in parallel to allow easy daisy-chaining of two systems. The 4-pin Neutrik connector is used in Biamp mode for both the HF and LF inputs. The wedge shape provides a 31 degree front slant for floor monitoring.

The steel recessed bar-handles, injection molded corner protectors, and black carpeted exterior make this road-worthy system attractive, rugged and easily transportable. The XLT48 has provision for adding an external stand socket and has 5/16"-18 threaded inserts on its sides for permanent mounting.

### PRELIMINARY SPECIFICATIONS

#### Loudspeaker Type:

Two-way, Full-Range, Bass-Reflex Monitor System

**Frequency Response:** 50 Hz to 18 kHz

**Power Handling:** 200W RMS; 500W Program

**Sensitivity (1 Watt / 1 Meter)** 98.5 dB SPL

**Nominal Dispersion:** 90° Horizontal, 40° Vertical

**Nominal Impedance:** 8 ohms

**Crossover Frequency** 2 kHz

#### Drivers:

One 1" Titanium Compression Driver on a Pattern Control Horn

One 15" Woofer, Ferrofluid-cooled

**Speaker Protection** PowerSense DDP

#### Connectors (All wired in parallel):

Two Neutrik Speakon

Two 1/4 inch phone jacks

#### Enclosure Material and Finish:

Black carpet covered oriented Strand Board

16 gauge perforated steel grille

#### Dimensions:

Height: 19 inches (483 mm)

Width: 20.25 inches (514 mm)

Depth: 31 inches (788 mm)

**Weight:** 62 lb. (28 kg)

**Shipping Weight** 70 lb. (31.8 kg)




# XLT48

## TWO-WAY MONITOR SYSTEM


### FREQUENCY RESPONSE

PASSIVE MODE

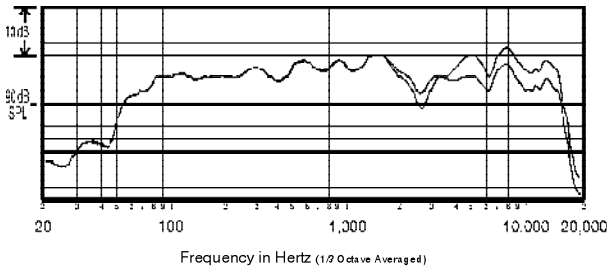


### IMPEDANCE

PASSIVE MODE

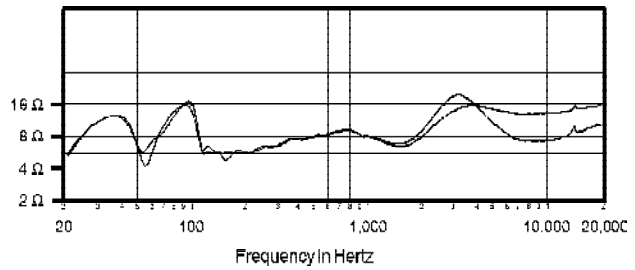


### FREQUENCY RESPONSE

BIAMPLIFIED MODE

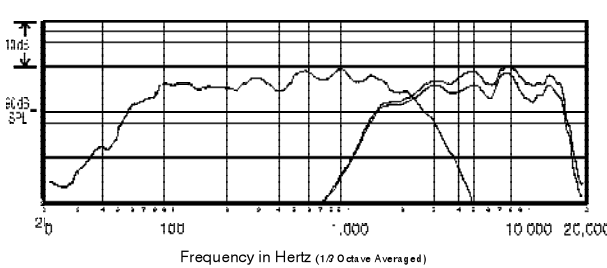


### IMPEDANCE

BIAMPLIFIED MODE

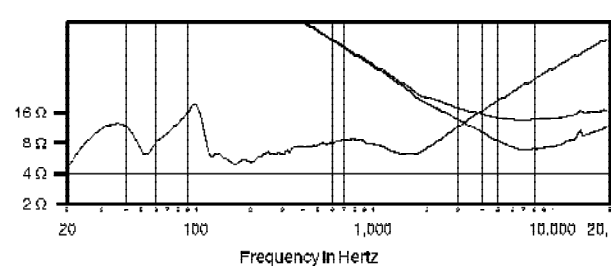

### DIMENSIONS

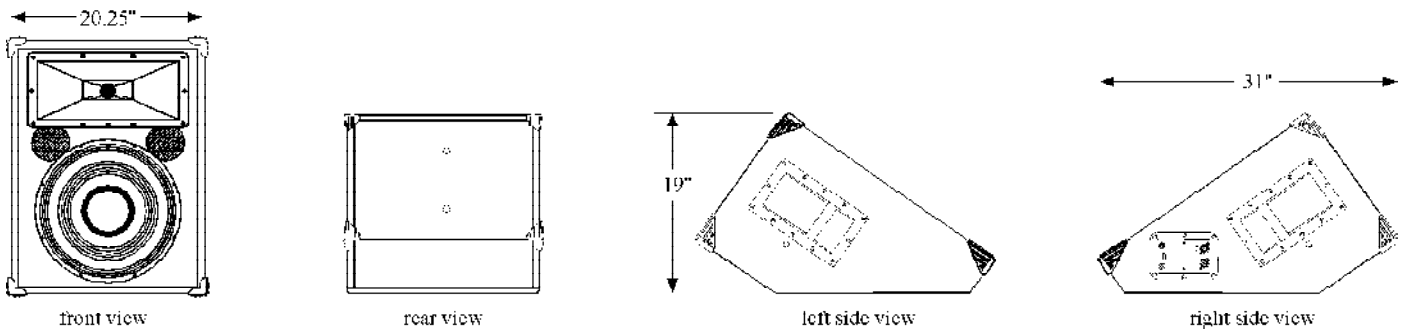

### ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The loudspeaker system shall be a direct-radiating, bass-reflex design with one Ferrofluid-cooled 15 in. woofer and one 1 in. titanium diaphragm compression driver coupled to a Pattern Control horn. All components shall be connected to an integral crossover/protector. The crossover/protector shall be a two-way design with 12 dB/octave low pass at 2 kHz to the woofer and 12 dB/octave high-pass at 2 kHz to the high-frequency driver. The crossover shall utilize a steel input panel with Neutrik NL4MP and 1/4 in. jacks, high quality 250V film capacitors, inductors, high positive current coefficient resistors (HPCCR's) for component protection and front/rear overcurrent indicators. A Passive/Biamp switch shall allow operation using one or two amplifier channels without need of an electronic crossover. An HF level control shall be switchable between Flat and +4 dB. The loudspeaker enclosure shall have an internal volume of 2.9 cu. ft. ( 82 L) and be constructed of well-braced OSB, covered in black carpeting with eight, stackable, injection molded corners, a 16 gauge perforated steel grille and two steel, recessed bar handles. The system shall meet the following performance criteria: Amplitude response of 50 Hz to 18,000 Hz +/- xx dB, 200W RMS power handling, 98.5 dB sensitivity at 1 meter with one watt applied. The horn coverage pattern shall be 90° H x 40° V. The loudspeaker shall be 19 in. (483 mm)H x 20.25 in. (514 mm) W x 31 in. (788 mm) D and weigh 61.5 lb. (27.9 kg). The system impedance shall be 8 ohms nominal.

### LIMITED WARRANTY

Community XLT loudspeaker systems are guaranteed to be free from defects in materials and workmanship for a period of five years from the original date of sale. Since the warranty applies to the product, the remainder of the warranty period will be automatically transferred to any subsequent owner. Only failures caused by defects in materials and workmanship are covered, not failures caused by abuse, accident, modification, improper handling/installation, or repairs made without factory authorization or by other than an authorized Community Field Service Station. Products covered by this warranty will be repaired or replaced at the option of Community, without charge for materials or labor, provided all the terms of this warranty have been met. This statement is a condensed version of the Community Product Warranty, intended for quick reference only. For complete warranty information, consult the product owners manual or call (610) 876-3400 for a copy.

### PRELIMINARY SPECIFICATIONS

XLT48 Page 2 of 2

COMMUNITY PROFESSIONAL LOUDSPEAKERS

333 East Fifth Street Chester, PA 19013-4511 USA Phone (610) 876-3400 Fax (610) 874-0190

9709023A